
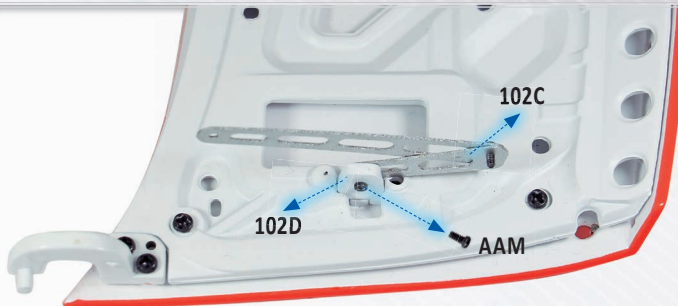


DISASSEMBLY



You have received a new, improved rear deck lid. These simple instructions will help you remove the components that are attached to the old one.

01 Start by removing rear spoiler 103A from rear deck lid 4A. To do so, simply remove the six ABM screws that secure it. Next, remove both safety pin surrounds 4D by removing the two ZM screws that hold each one in place. Keep track of the screws you remove so you can use them when installing the new rear deck lid.

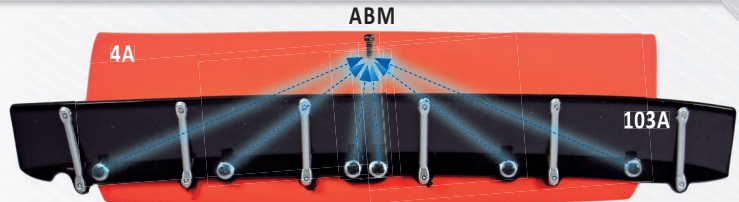

02 Next, flip the rear deck lid over and, from the inside, remove the AAM screw that secures rear deck lid hinge short arm 102C to rear deck lid hinge bracket 102D.


03 Next, remove the eight AEM screws that secure rear deck lid reinforcement 102A to the inside of the lid.

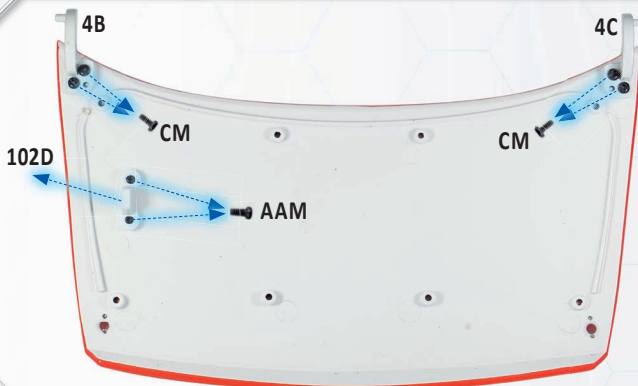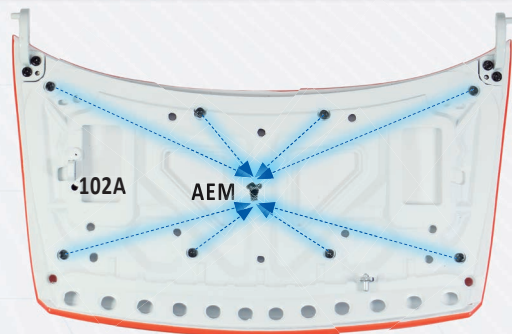

04 Finally, remove the two AAM screws that secure rear deck lid hinge bracket 102D to the rear deck lid and the four CM screws that secure trunk lid hinges R 4B and L 4C. Set the hinges aside so that you can tell which one belongs to each side.



ASSEMBLY

Follow these simple instructions to reattach the parts removed from the old trunk lid to the new one before proceeding with the installation.

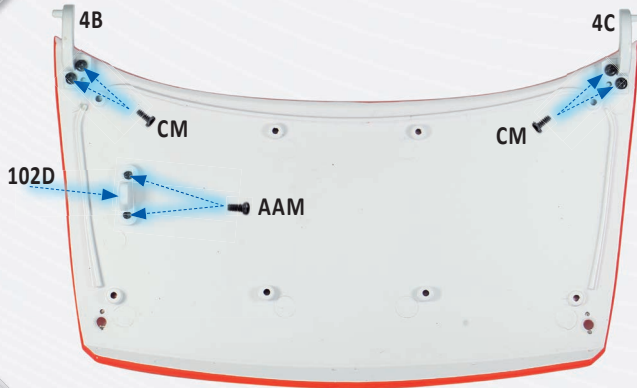

01 Take the new, improved rear deck lid and secure rear deck lid hinge bracket **102D** in place using two **AAM** screws. Next, position trunk lid hinge R **4B** on the right-hand side (on the left with the deck lid turned upside down) and secure it using two **CM** screws. Then, position trunk lid hinge L **4C** on the other side and secure it using two more **CM** screws.

02 Continue by installing rear deck lid reinforcement **102A** on the inside of the rear deck lid. Secure it using eight **AEM** screws.

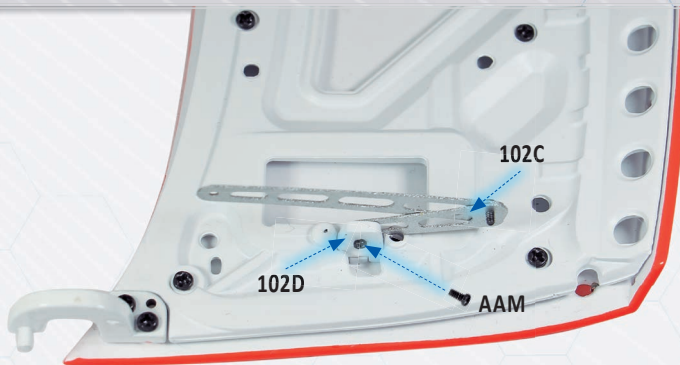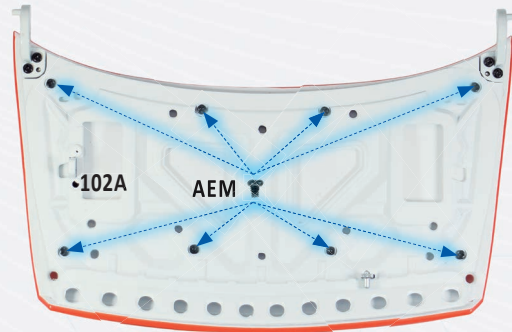

03 Secure the end of rear deck lid hinge short arm **102C** to rear deck lid hinge bracket **102D** using an **AAM** screw.

04 Finally, reinstall both safety pin surrounds **4D**, securing each one using two **ZM** screws. To finish, position rear spoiler **103A** on the rear deck lid and secure it using six **ABM** screws.

